



Cedar Shake Roof Reference Sheet

Product / Accessories Layout & Installation

Brava manufactures a variety of profiles, each with different accessory components and specific applications. Before loading the roof and starting installation, take inventory of all materials received, confirm which pallets the products are located on, and identify where each component will be installed. To successfully prepare for layout and installation, use the provided diagram, order checklist, and packing list to verify all items and prevent installation issues.

Standard Field Shake

(Structural Ribbing Back)
Install at all roof sections.

14.3 Bundles per Square



Solid Shake

(Solid Back)
Install at rake and/or valleys
(optional upgrade).

4.1 lineal feet per bundle



Hip/Ridge Shake

Available in three configurations
depending on application and roof pitch.*
8.3 lineal feet per bundle



Cut Shakes

Factory edge to the outside.

Ice & Water Shield

Recommended at eaves and valleys.

Underlayment

Synthetic recommended.

Starter

Install at eaves.
Thick edge installed
toward eave. 10 lineal
feet per bundle

Note: Images not to scale.

*For more detail on Hip/Ridge angles and application, refer to the installation guide.

IMPORTANT: Complete a full review of all technical resources and installation requirements before beginning your project. **Level 1 Installation Training** should also be completed prior to installation. In addition, review all project documentation, including the order confirmation, packing list, and installation guide, to ensure all materials and instructions are verified before starting. **Contact our support team anytime at 844-290-4196 | bravarooftile.com**

Order Confirmation

Brava Roof Tile
810 E. Tyler Street
Washington, IA 52353

Name: _____ Address: _____ City: _____ State: _____ Zip: _____

Phone: _____ Email: _____

Project: _____


Date: _____

Total: _____


Brava Order Confirmation

PACKING LIST			
Brava 100 915 East Tyler Street Washington, IA 52353		Shipping Date: 9/22/22	
Ship To: Brava Tile 915 East Tyler Street Washington, IA 52353		Ship To: XYZ Contractor 123 Main Street Washington, IA 52353	
Contact Name: BRAVA ROOF TILE-SHIPING 319-931-2773		Shipping Method: Pallet 1400 KPO PROR 851488911	
Item Description	Quantity	Unit of Measure	
Cedar Shake 5" Field Tile		Each	
Cedar Shake 7" Field Tile		Each	
Cedar Shake 12" Field Tile		Each	
Cedar Shake Starter		Each	
Cedar Shake Hip & Ridge		Each	
Cedar Shake Solid Tile		Each	
1.75" 2600ct Coil Nails		Box(s)	
1.75" 2200ct Coil Nails		Box(s)	
3" Hand Nails		Rolls	
Synthetic Underlayment		Rolls	
Ice & Water Underlayment		Rolls	
Color: ASPEN		Total Weight:	35,000.00 lbs
			18 PALLETS

Brava Order Packing List

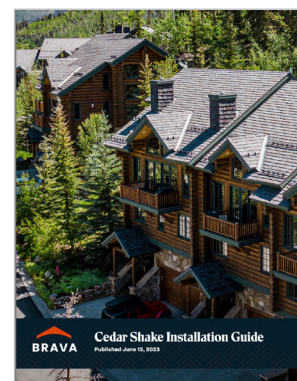

Brava Installation Guide

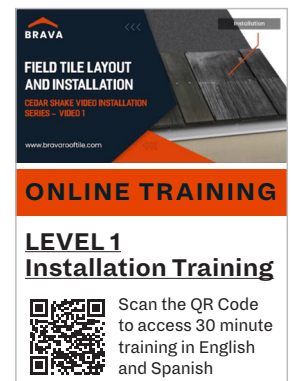

Brava Installation Training

Hip/Ridge Cap Recommendations

Follow the chart below to determine correct Hip/Ridge Cap for the slope of your project installation. Brava recommends measuring the angle of the hip or ridge before ordering material to ensure the best fit.

Low, Standard, and Steep Shake Hip/Ridge Cap

Install Hip or Ridge shingles caps correct angles.



Low (160°)



Standard (120°)



Steep (90°)



1 Ridge Cap

- Low: 4:12 or lower
- Standard: 5:12 – 10:12
- Steep: 11:12 or higher

2 Hip Cap

- Low: 5:12 or lower
- Standard: 6:12 – 14:12
- Steep: 15:12 or higher

Note: Recommendations are for symmetrical hip and ridge and may be affected by design and application factors. Material should be ordered only after verifying the angle of the hip or ridge.

Included in Your Order:

Product Name	Product Image	Installation Notes
Starter 12" x 12"		The Starter is used along the eave line and slope transitions to provide proper coverage for the first row of shake. Each 10 pc/16 lb bundle provides 10 lineal feet of eave or slope transition coverage.
Solid Field Tile 22" x 12"		Optional Solid Shake accessory gives the roof a realistic appearance at visible cut edges. These “solids” are recommended for use along rakes (gable ends) and in open valleys. When installed with 10" maximum exposure, each 5 pc/22.5 lb bundle provides 4.1 lineal feet of rake or valley coverage. SEPARATE FROM STANDARD FIELD SHAKES Note: These bundles and pieces are twice as heavy during roof loading and installation.
Low Slope Hip/Ridge Cap 14" x 5 3/8" x 6"		Hip/Ridge Caps give a finished appearance at hips and ridges. Shake Hip/Ridge Cap is manufactured in three different slope ranges. Measure the angle at the hip or ridge and choose the closest matching angle of Hip & Ridge Cap. When installed with 10" maximum exposure, each 10 pc/20 lb bundle provides 8.3 lineal feet of hip or ridge coverage. Install on appropriate slopes per recommended ranges, SEPARATE FROM OTHER HIP/RIDGE PIECES
Standard Slope Hip/Ridge Cap 14" x 5 3/8" x 6"		
Steep Slope Hip/Ridge Cap 14" x 5 3/8" x 6"		

Note: This table is for Brava manufactured accessories only.



Brava Roof Tile
915 E. Tyler Street | Washington, IA 52353 | ©2025 Brava Roof Tile
For more information please visit bravarooftile.com or call 844-290-4196 05/25