

10", 13" and 18" Tubular Skylight Technical Specifications




TUBULAR SKYLIGHT COMPONENTS:

1. Clear UV Protected, 100% High Impact Modified Acrylic Dome
2. (4) Phillips Head Stainless Steel 1/4" Sheet Metal Screws
3. Black Nylon Horse Hair Gasket (self-adhesive)
4. (6) Phillips Head Stainless Steel 1 1/2" Screws
5. Commercial Pure Grade, 1100 Series Aluminum Flashing
6. Heavy Duty Foil Tape
7. Light Pipe, (2) 24" Sections per Kit
8. White Nylon Horse Hair Gasket (self-adhesive)
9. (2) Small, (1) Large Polycarbonate Lenses - Energy Conservation Kit
10. (4) U-channel Self-Adhesive PVC Tabs (8 for 18" model)
11. (6) Tek Screws
12. (3) Black Speed Nuts
13. Aluminum Ceiling Ring
14. (3) 1 1/2" Phillips Head Screws
15. White Powder Coated Aluminum Trim Ring
16. Choice of Prismatic or Soft White Diffuser



Model	Coverage	Wattage	Max Tube Length
10"	up to 150 sf	up to 300 watts	18 feet
13"	up to 300 sf	up to 500 watts	20 feet
18"	up to 500 sf	up to 1,000 watts	20 feet

NOTE: 18" model used on homes with 24" on center construction.

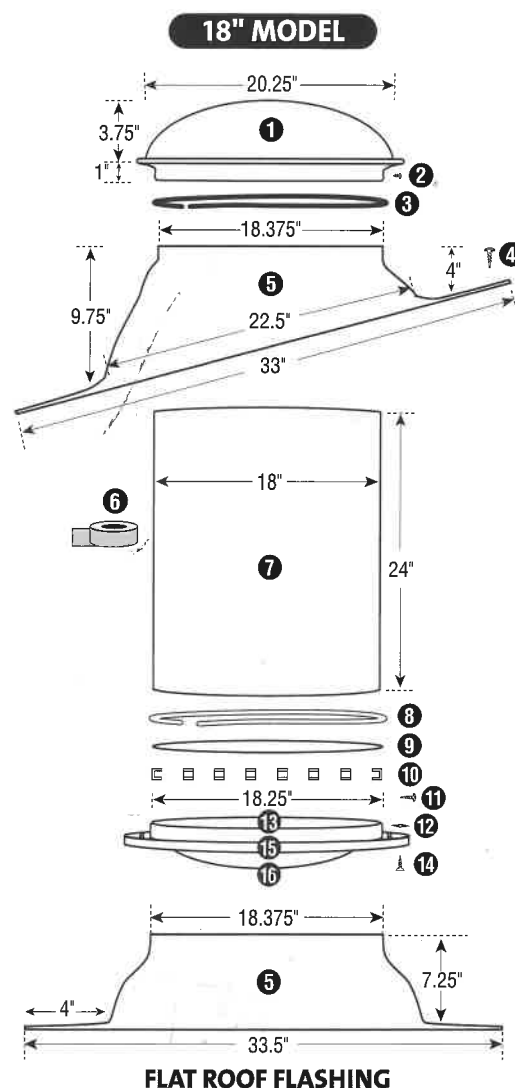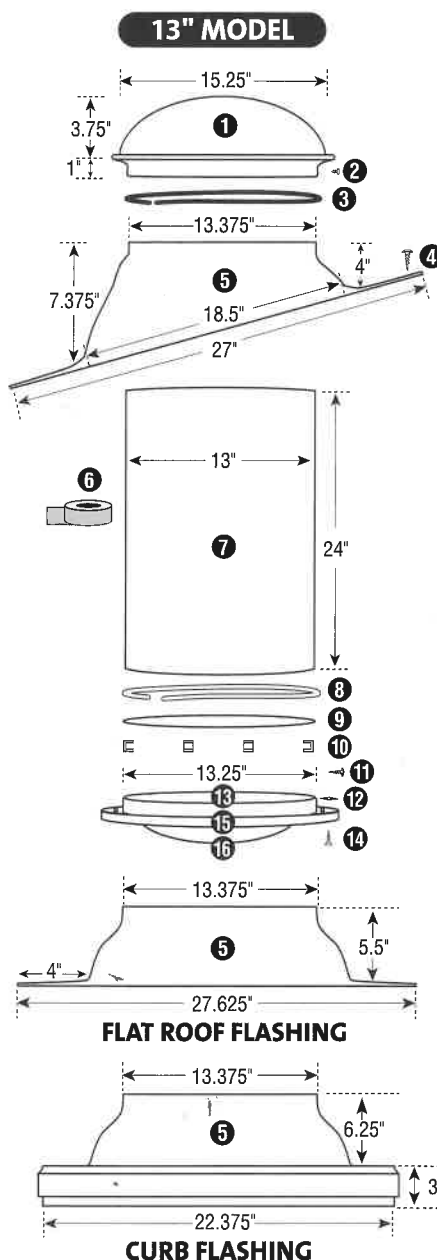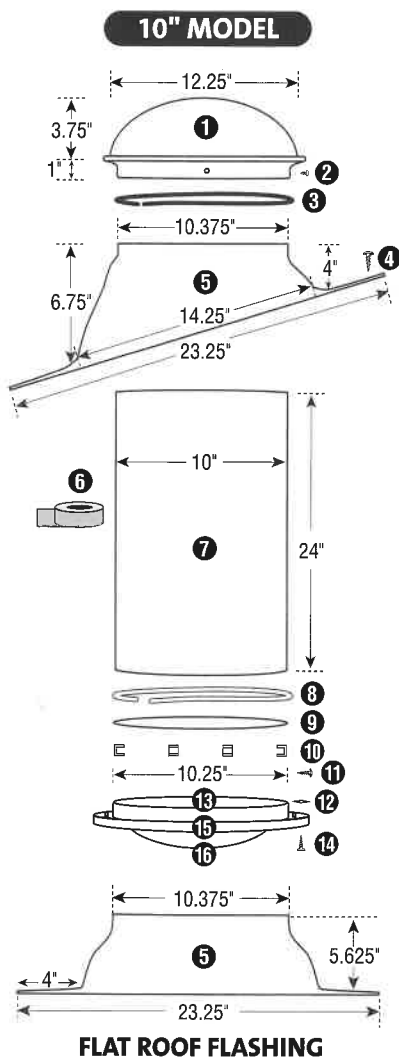

For more info, visit:
www.nltubular.com